



# HEAT PUMPS DEVELOPED FOR NORDIC CLIMATE



Lillehammer 09, Lillehammer 12, Trysil 6500 Floor



[wilfa.com](http://wilfa.com)

## Lillehammer 09 / A+

Auto/Cool/Dry/Fan/Heat mode

- Heating capacity at -15 C : **3600 W**
- Cover up to **60 m<sup>2</sup>**
- Purifier functions:  
Silver Ion Filter\*, Active Carbon\* Filter and Cold Plasma\*
- R 410A



Indoor:



Remote:




Outdoor:



## Lillehammer 12 / A+

Auto/Cool/Dry/Fan/Heat mode

- Heating capacity at -15 C : **4200 W**
- Cover up to **100 m<sup>2</sup>**
- Purifier functions:  
Silver Ion Filter\*, Active Carbon\* Filter and Cold Plasma\*
- R 410A

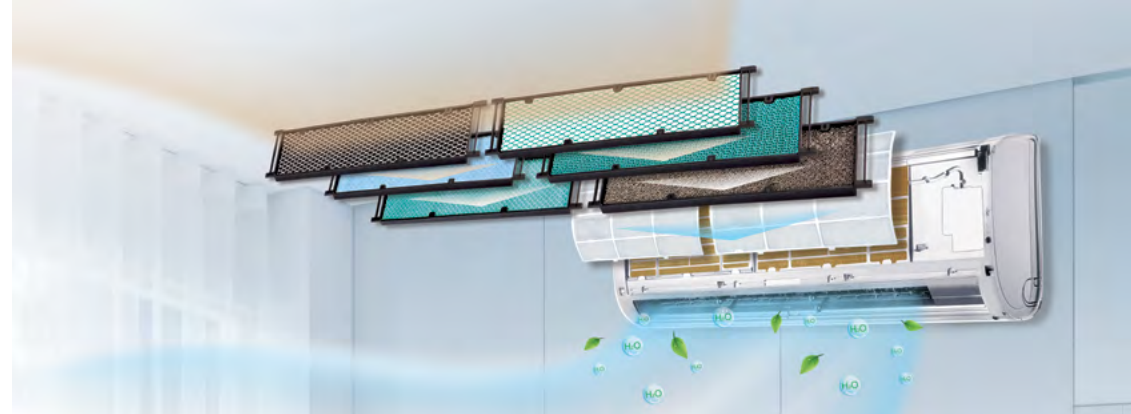

### \*Silver Ion Filter

Silver ion is able to sterilize 99% of bacteria by suppressing proliferation of mold and bacteria and preventing the causes of unpleasant odors.

### \*Active Carbon Filter

Activated carbon can effectively absorb smoke, pet odors and other unpleasant odors.

### \*Cold Plasma

Effective sterilization with more than 90% of bacteria killed.

- Odor removal
- Air nutrition improvement with more negative oxygen ions

## Trysil 6500 Floor / A+

Auto/Cool/Dry/Fan/Heat mode

- Heating capacity at -15 C : **4700 W**
- Cover up to **140 m<sup>2</sup>**
- Outblow top and bottom
- Purifier functions:  
Silver Ion Filter\*, Active Carbon\* Filter and Cold Plasma\*
- R 410A



Indoor:



Remote:



Outdoor:




**I Feel function.** The remote can sense its surrounding, and transmit the signal back to the indoor unit, so the unit can adjust the air flow to provide maximum comfort.



**Keep warm function.** Maintain the room temperature steadily at 8°C and prevent the room from freezing.

### COP values at variable outdoor temperatures

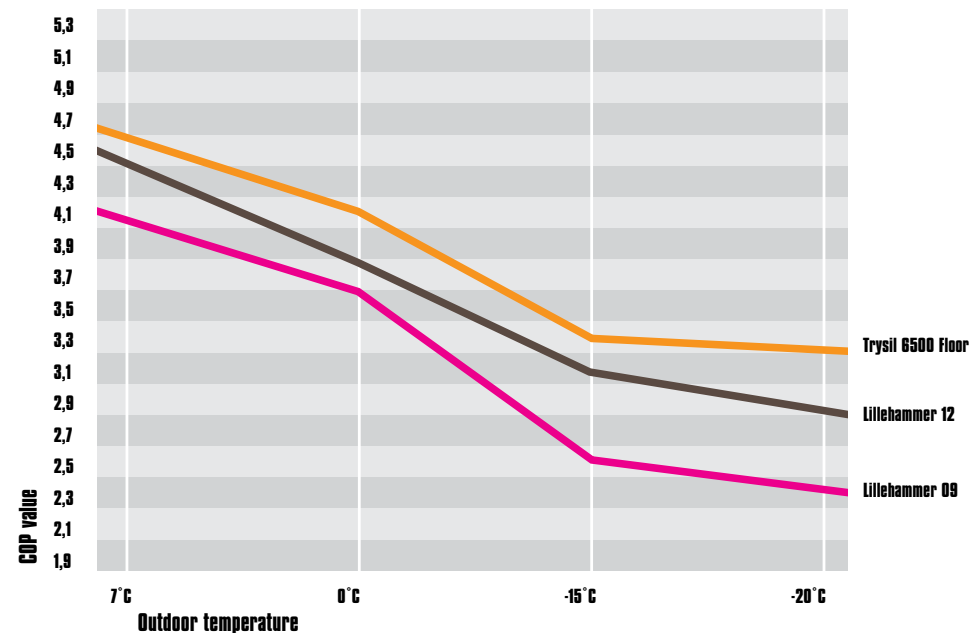

## Technical specifications:

	Lillehammer 09 9000 BTU	Lillehammer 12 12000 BTU	Trysil 6500 Floor 12000 BTU
Capacity heat W	5200 / 2800 / 450	5500 / 3670 / 600	6500 / 4700 / 600
Capacity cool W	3230 / 2600 / 450	3960 / 3500 / 600	3950 / 3520 / 600
Rated input ( max - min )	Heat 1550/755/200	Heat 1650/989/220	Heat 1580/1100/220
	Cool 1420/805/200	Cool 1550/1084/220	Cool 1400/1100/220
Air-flow m3/h indoor	max - 560 min - 330	max - 660 min - 330	max - 600 min - 280
Sound indoor (min-max)	21 - 39 dB	21 - 42 dB	22 - 42 dB
Sound outdoor (min-max)	55 - 61 dB	57 - 62 dB	52 - 63 dB
COP heat	4,1 *	4,5 *	4,7 *
Energy class Average	A+	A+	A+
Indoor mm WxHxD	790 x 275 x 200 mm	845 x 289 x 209 mm	700 x 600 x 215
Outdoor mm WxHxD	776 x 540 x 320 mm	776 x 540 x 320 mm	848 x 540 x 320
Max pipe lenght	20 m	20 m	15 m
Power connection	Outdoor	Outdoor	Outdoor
Refrigerant	R410 A	R410 A	R 410 A
Factory Guarantee	- 25 C	- 25 C	- 25 C
Fuse / Amper	10 A	10 A	10 A

\* COP-value tested with outdoor temperature +7°C.

All Wilfa models have stronger compressor for Nordic climate area with electric heater and chassis heater. Guarantees/Warranty and returns, according to National regulations:

[http://europa.eu/youreurope/citizens/consumers/shopping/guarantees-returns/index\\_en.htm](http://europa.eu/youreurope/citizens/consumers/shopping/guarantees-returns/index_en.htm)

For more info visit [wilfa.com](http://wilfa.com)

wilfa